



KME AGRI

High-Quality, Low-Emission Slurry Equipment



📍 Kilmeaney, Kilmorna, Listowel, Co. Kerry. V31FF88 • T: 068 45005 • E: agrisales@kme.ie • www.kmeagri.com

About KME AGRI

Founded in 2019 and based in Listowel, Co. Kerry, Ireland, we are a leading manufacturer and supplier of high-quality, low-emission slurry equipment. We specialize in retrofitting existing tankers with new features and offer a comprehensive range of low-emission slurry equipment, including dribble bars and trailing shoes in various widths and configurations to meet all customer requirements. Our main product offerings include trailing shoes, dribble bars, slurry tankers, macerators, umbilical equipment, parts, and many more. We are constantly working on new product development initiatives to enhance our product offerings and meet the evolving demands of the market.

We place a huge emphasis on the design and build quality of all our products. Our engineers ensure that all products meet customer needs and are made from high-quality materials to ensure superior performance and longevity. All our products are easy to maintain and service, and we are always available to assist customers with any issues or queries they may have. We currently supply products to customers throughout Ireland and the UK through our expanding dealer network and we are in the process of expanding into additional EU markets.



CONTENTS

Our Range of Low-Emission Slurry Equipment	2
Contour & Hybrid Trailing Shoes	3
7.5M Eco+ Trailing Shoe	5
10M Proglide+ Trailing Shoe	6
7.5M Uni Dribble Bar	8
9.6M Uni Dribble Bar	9
10M Uni Dribble Bar	10
12M Uni Dribble Bar	11
VT 2000 LPG Slurry Tanker	13
VT 2500 LPG Slurry Tanker	14
VT 2750 LPG Slurry Tanker	15
Multi-cut Easy 28/36 Macerator	16
Verti-cut Mini Macerator	17
Static Slurry Macerator	18
Umbilical Pump System with Bauer SX1000 Pump	19
HR 800 Hose Reeler	20



OUR RANGE OF LOW-EMISSION SLURRY EQUIPMENT

Our range of low-emission slurry equipment consists of trailing shoes and dribble bars, various widths and configurations to meet all customer needs and requirements.

TRAILING SHOES

Our current trailing shoe range consists of different models, from 7.5 metres to 12 metres. All machines feature our unique contour following arms. A machine suited to new tanks and retrofitting to existing tanks.

DRIBBLE BARS

Our dribble bars range in width from 7.5 metres to 16 metres and from umbilical to retrofit which fits them to all makes and shapes of tanks. All our chassis are mounted with bespoke brackets for each type of tank.

Our product range also includes slurry tankers, macerators, umbilical equipment and much more.



CONTOUR & HYBRID TRAILING SHOES

FEATURES AND BENEFITS

- Available in 7.5m, 10m and 12m
- Available with our horizontal multi-cut or vertical verti-cut macerators
- This machine is designed to operate on rough and uneven ground where operating a conventional trailing shoe would be prohibited
- Additional features include brake back arms



PRODUCT SPECIFICATIONS

Working width	Weight (kg)	Macerator make	Macerator outlets	Shoe spacing (cm)	Single /double folding	Transport width (m)	Transport height (m)	No. Spools required
7.5m	600kg	KME multi-cut/verti-cut	28	27	Single	2.25	2.7	Two double acting
10m	710kg	KME multi-cut/verti-cut	40	27	Double	2.2	2.5	Two double acting
12m	1,090kg	KME multi-cut/verti-cut	48	27	Double	2.45	3.6	Four double acting / load sensing



7.5M ECO+ TRAILING SHOE

FEATURES AND BENEFITS

- Design and build quality
- Available with our horizontal multi-cut or vertical verti-cut macerators
- 7.5 metre and has 28 outlets
- Number of hydraulics services required:
2 double acting spool valves
- Shoe/spring system used: spring steel leaf and steel shoe



PRODUCT SPECIFICATIONS

Working width	Weight (kg)	Macerator make	Macerator outlets	Shoe spacing (cm)	Single /double folding	Transport width (m)	Transport height (m)	No. Spools required
7.5m	680kg	KME multi-cut / verti-cut	28	27	Single folding	2.4	3.2	Two double acting

10M PROGLIDE+ TRAILING SHOE

FEATURES AND BENEFITS

- Design and build quality
- Close mounting to existing tank and chassis mounting brackets
- Requires only two number hydraulic spool functions
- 40 outlet KME Agri vertical verti-cut macerator with integrated safety switch
- Contour following technology always applying even pressure across all shoes
- Double folding arms for reduced height
- Rear lights and marker boards for improved safety
- Integrated stone trap
- Reduces loss and increases ability to utilise slurry on the grazing platform



PROGLIDE+ TRAILING SHOE



**LED LIGHTS AND
MARKER BOARDS**



**EXISTING FILL POINTS AND
SPLASH PLATE RETAINED**



**SUPPORT ARMS FOR
TRANSPORT**


PRODUCT SPECIFICATIONS

Working width	Weight (kg)	Macerator make	Macerator outlets	Shoe spacing (cm)	Single /double folding	Transport width (m)	Transport height (m)	No. Spools required
10m	1,190kg	KME verti-cut	40	26	Double folding	2.45	3.2	Two double acting

7.5M UNI DRIBBLE BAR

FEATURES AND BENEFITS

- Design and build quality
- Close mounting to existing tank and chassis mounting brackets
- Requires only two number hydraulic spool functions
- 28 outlet KME Agri horizontal multi-cut or vertical verti-cut easy macerator with integrated safety switch
- Spring protected arms
- Rear lights and marker boards for improved safety
- Integrated stone trap
- Reduces loss and increases the ability to utilise slurry on the grazing platform

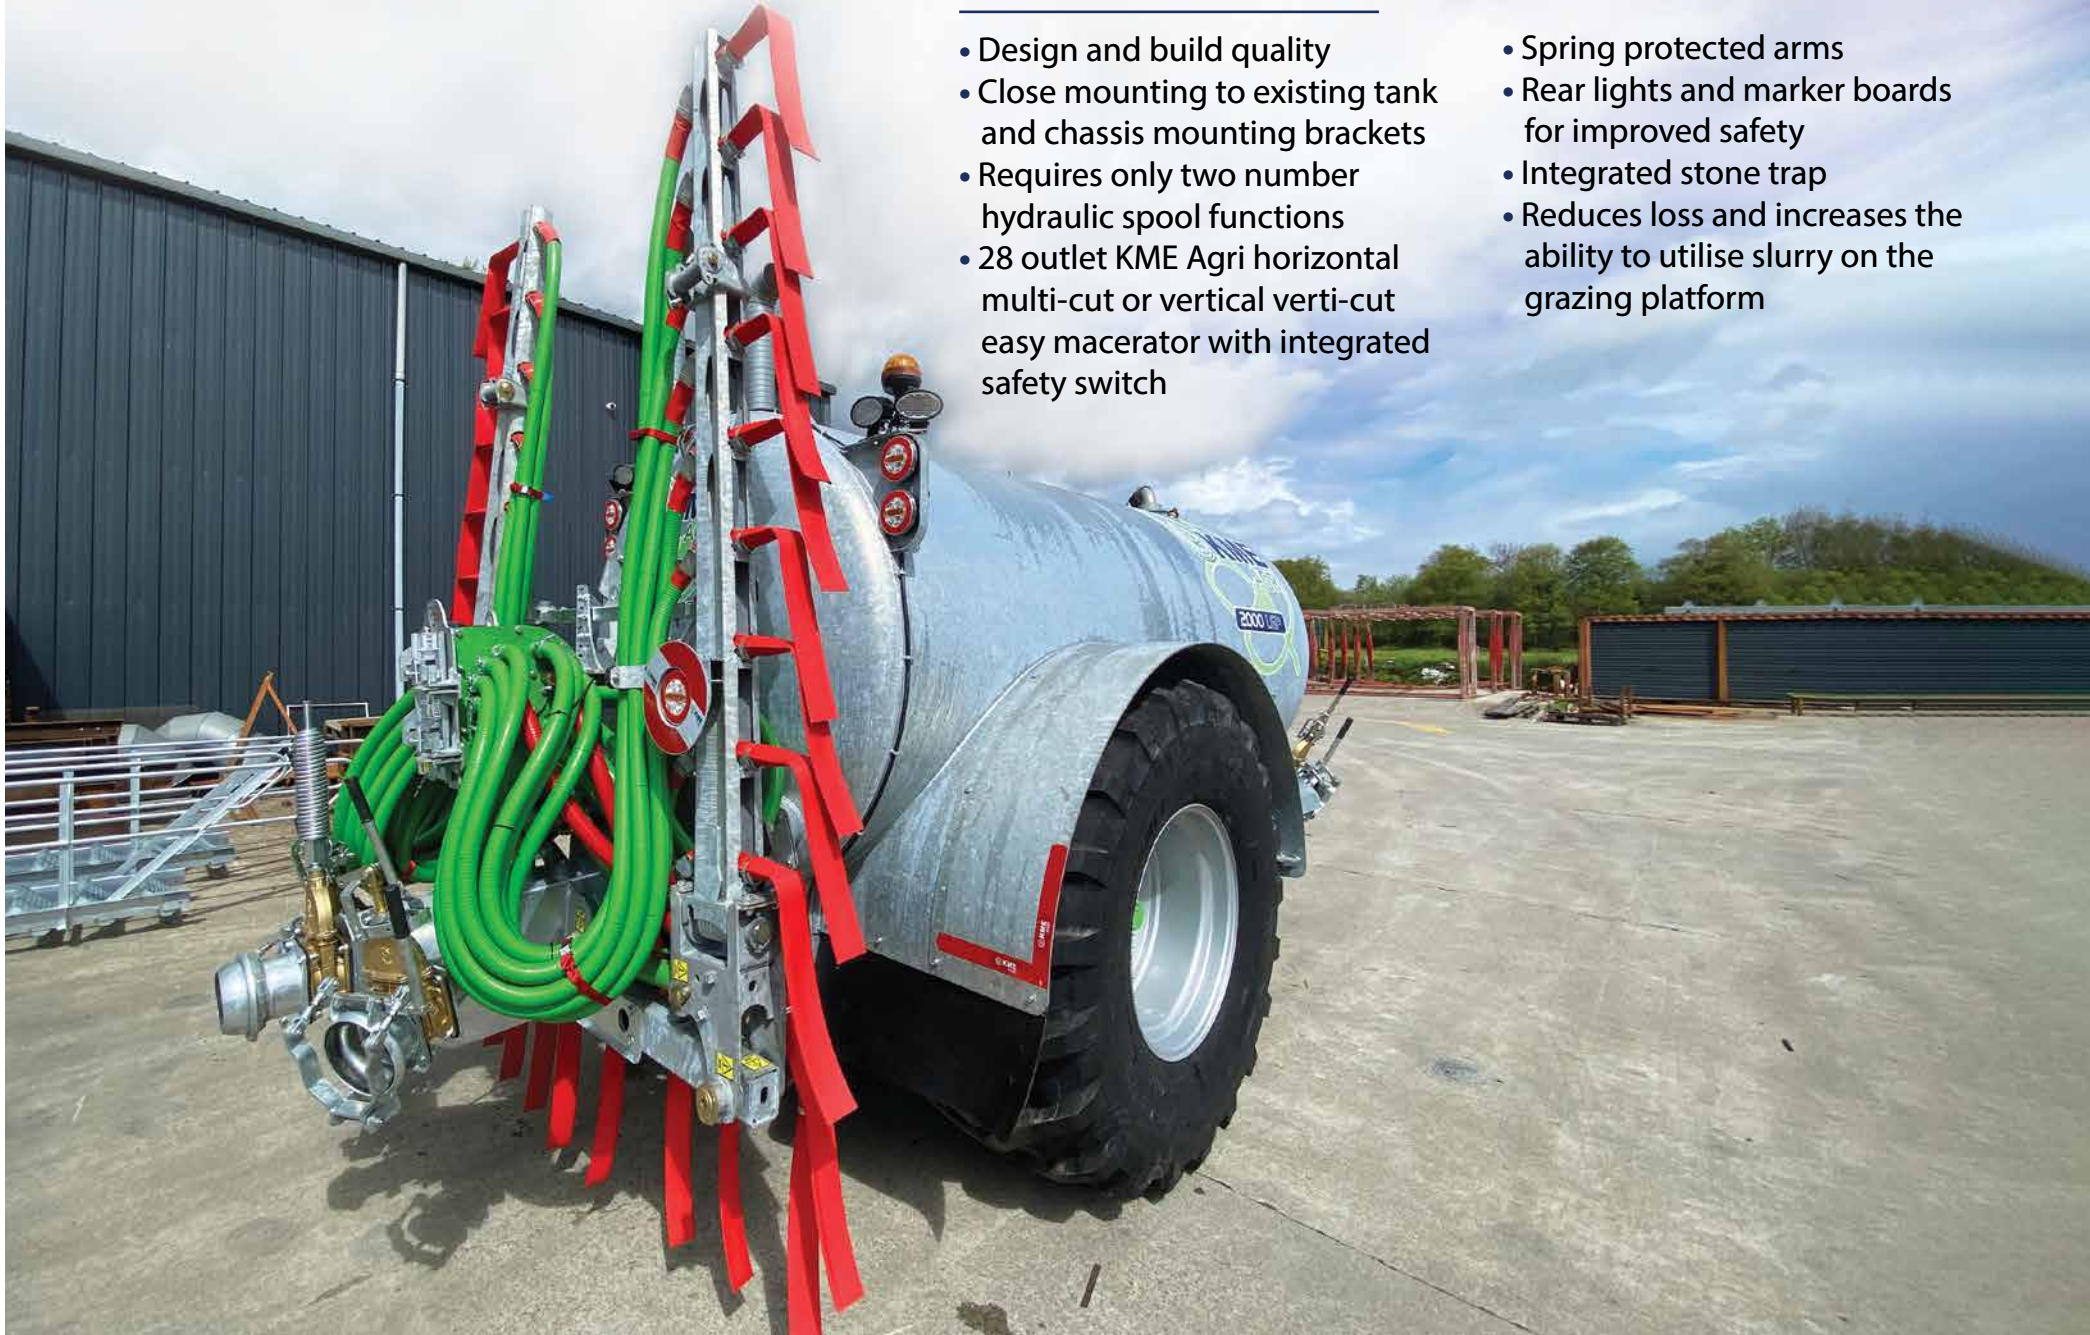

9.6M UNI DRIBBLE BAR

FEATURES AND BENEFITS


- Design and build quality
- Close mounting to existing tank and chassis mounting brackets
- Requires only two number hydraulic spool functions
- 36 outlet KME Agri horizontal multi-cut or vertical verti-cut easy macerator with integrated safety switch
- Double folding hydraulic break back outer arms
- Rear lights and marker boards for improved safety
- Integrated stone trap
- Reduces loss and increases the ability to utilise slurry on the grazing platform



10M UNI DRIBBLE BAR

FEATURES AND BENEFITS

- Design and build quality
- Close mounting to existing tank and chassis mounting brackets
- Requires only two number hydraulic spool functions
- Double folding hydraulic break back outer arms
- Rear lights and marker boards for improved safety
- Integrated stone trap
- Reduces loss and increases the ability to utilise slurry on the grazing platform

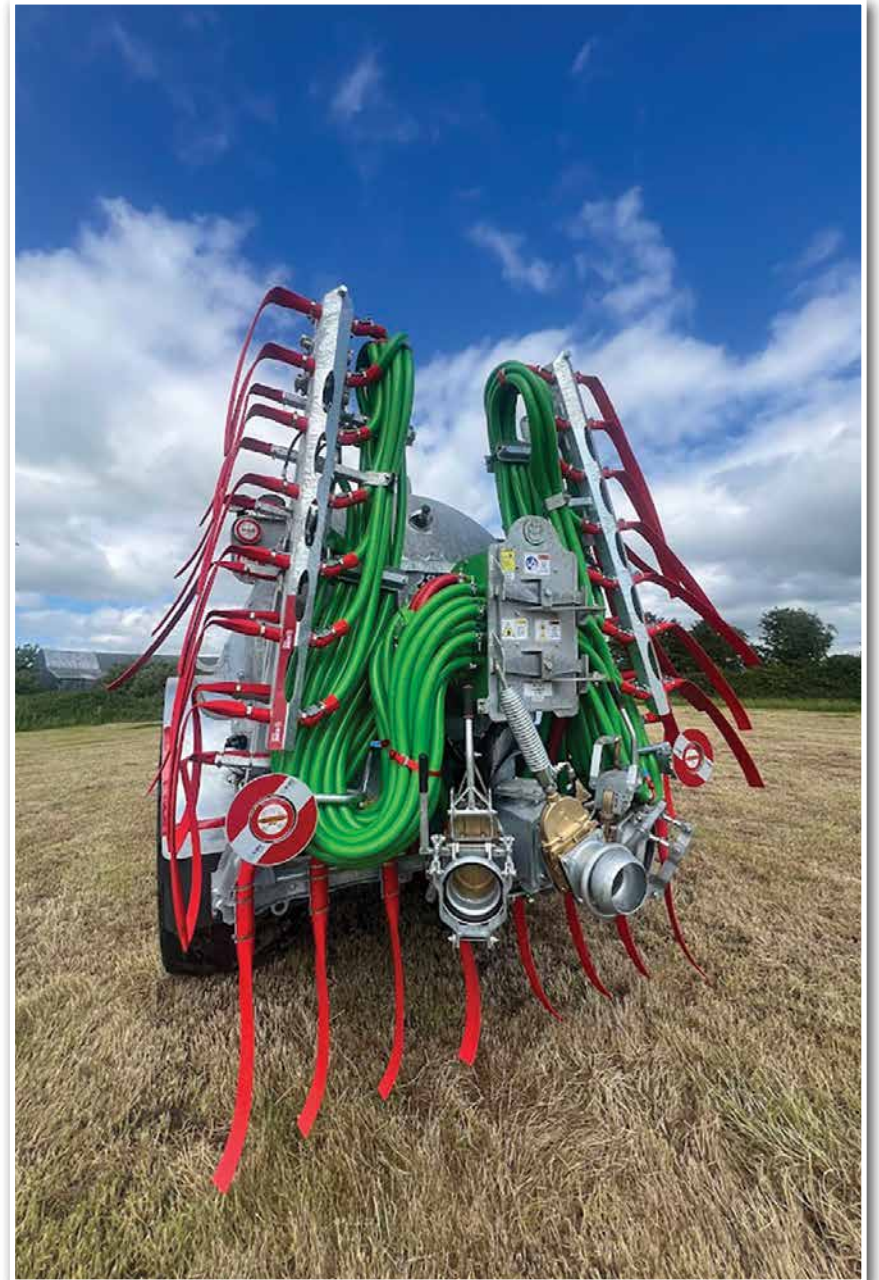

12M UNI DRIBBLE BAR

FEATURES AND BENEFITS


- Design and build quality
- Close mounting to existing tank and chassis mounting brackets
- Requires only two number hydraulic spool functions
- Double folding hydraulic break back outer arms
- Rear lights and marker boards for improved safety
- Integrated stone trap
- Reduces loss and increases the ability to utilise slurry on the grazing platform



UNI DRIBBLE BAR



**LED LIGHTS AND
MARKER BOARDS**

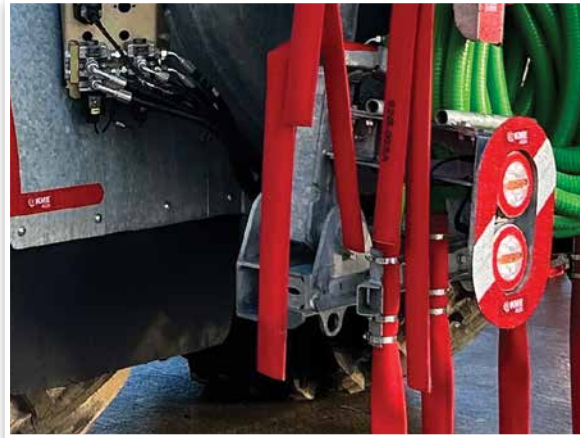

**CHASSIS MOUNTING
BRACKETS**



**EXISTING FILL POINTS AND
SPLASH PLATE RETAINED**



LAY FLAT HOISING



VT 2000 LPG SLURRY TANKER

FEATURES AND BENEFITS

- MEC 11000 vacuum pump
- Commercial high-speed stepped axle
- Full-length sight tube
- 800 X 65 R32 BKT tyres
- Side marker lights
- Fitted with 7.5m dribble bar
- High mounted LED lights
- Work lights



VT 2500 LPG SLURRY TANKER

FEATURES AND BENEFITS

- Fitted with 4" rain gun
- Commercial high-speed stepped axle
- High mounted LED lights
- Work lights
- Air over hydraulic brakes
- Full-length sight tube
- Bauer SX1000 slurry pump
- Hydraulic driven vacuum
- 6" lazy arms
- Side marker lights



VT 2750 LPG SLURRY TANKER

FEATURES AND BENEFITS

- 800 tyres on a straight commercial high-speed axle
- Spring drawbar with bolt-on swivel hitch
- 24-inch hinged access door
- Full-length sight tube
- 8-inch autofill lazy arm
- Side splash plate carrier
- 11,000 litre pump




MULTI-CUT EASY 28/36 MACERATOR

FEATURES AND BENEFITS

- Design and build quality
- Optimum distribution across all outlets
- Industrial leading venting technology
- Integrated cover safety switch
- Removable flow control plates to reduce forward speed in light slurry
- Danfoss hydraulic motor
- Easy maintenance and service
- X6 double sided blades
- Hardox shear plate



PRODUCT SPECIFICATIONS

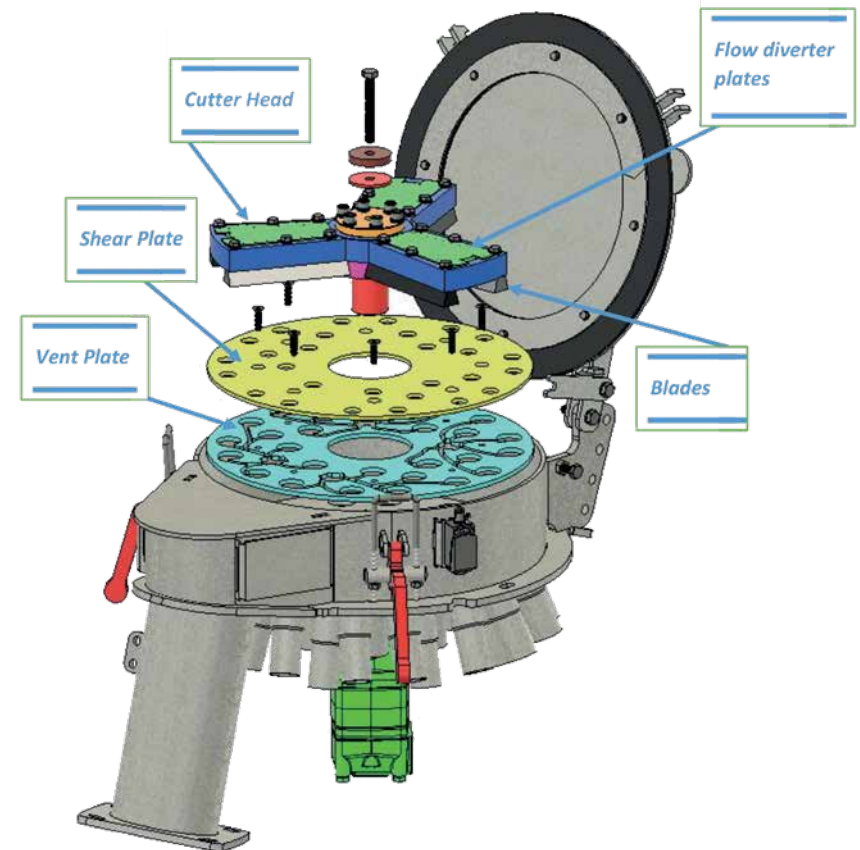


VERTI-CUT MINI MACERATOR

FEATURES AND BENEFITS

- Design and build quality
- Industrial leading venting technology
- Integrated cover safety switch
- Removable flow control plates to reduce forward speed in light slurry
- Danfoss hydraulic motor
- Easy maintenance and service
- X4 cutter heads
- Hardox shear plate

PRODUCT SPECIFICATIONS

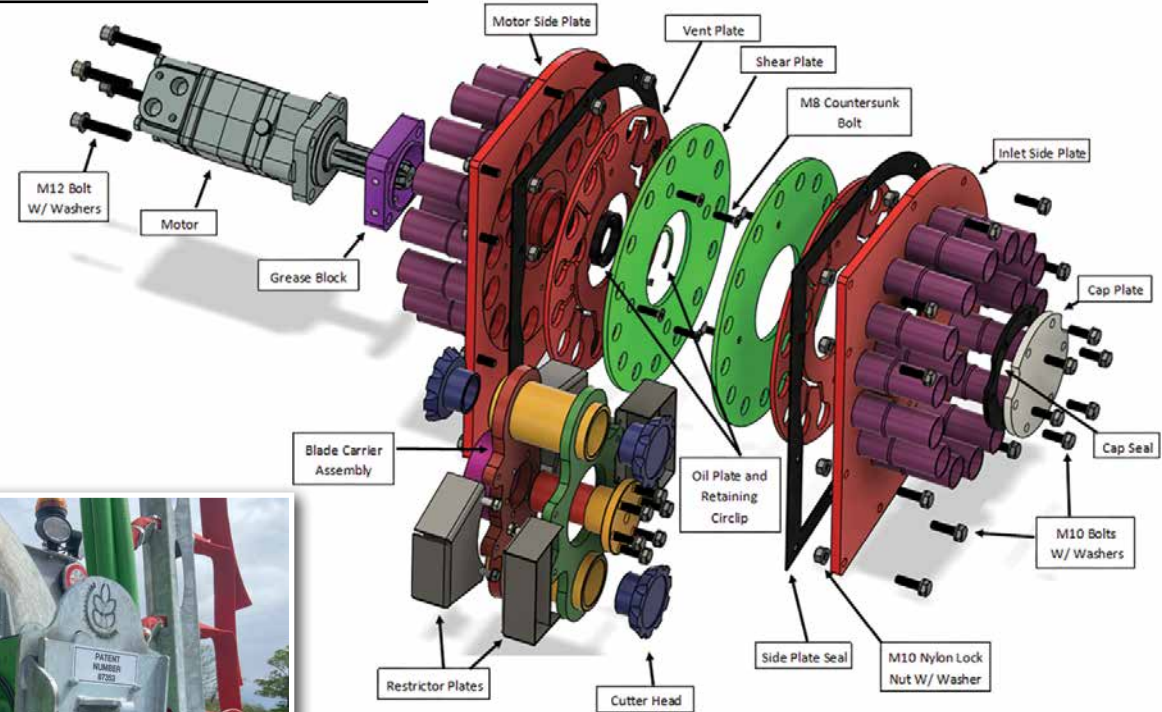

STATIC SLURRY MACERATOR

FEATURES AND BENEFITS


- 50,000 gallon capacity
- Various models available
- Danfoss hydraulic motor
- Static
- Integrated stone trap
- A frame mounted



UMBILICAL PUMP SYSTEM WITH BAUER SX1000 PUMP

FEATURES AND BENEFITS

- Bauer SX 1000 pump
- MEC 1000 hydraulic primer pump
- Swivel discharge point
- Return to tank valve
- Large sanitary trap
- High quality 6" indicated knife valves
- Preload sponge ball launch port with non-return valve
- 6" & 8" intake available
- 4" & 5" outlet available

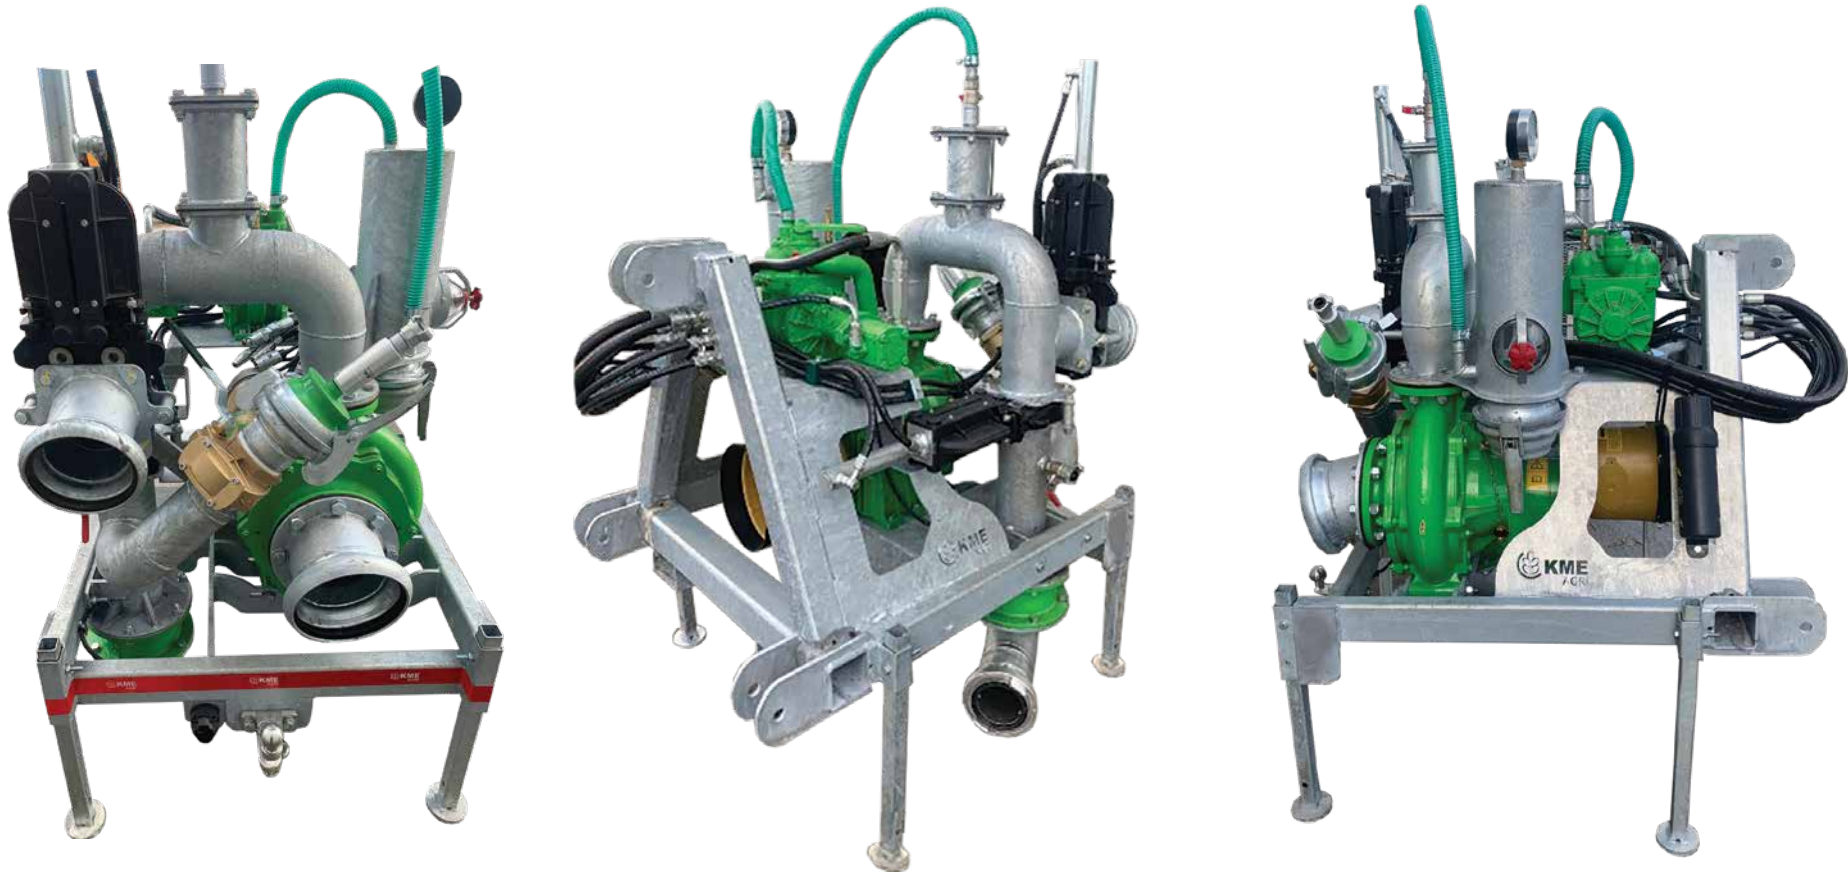

HR 800 HOSE REELER

FEATURES AND BENEFITS

- Unique drive gearbox
- LED road lights
- Top protective bar
- Trademark KME Agri squeeze bar





COMPANY CORE VALUES

HIGH QUALITY

We prioritize exceptional design and build quality in all our products.

CUSTOMER-FOCUSED DESIGN

We work closely with our engineers to ensure all our products meet customer needs.

SUPERIOR MATERIALS

We consistently use high-quality materials in our products to ensure superior performance and longevity.

EASY MAINTENANCE

All our products are very easy to maintain and service.

CUSTOMER CARE

We are readily available to assist customers with any issues or queries.

PRODUCT INNOVATION

We are constantly working on new product development initiatives to further enhance our product offerings and meet the evolving demands of the market.



PLEASE CONTACT US FOR MORE INFORMATION

Kilmeaney, Kilmorna, Listowel, Co. Kerry. V31FF88

T: 068 45005 • E: agrisales@kme.ie

www.kmeagri.com